

průmyslová zářivková svítidla

industrial fluorescent luminaires



TYP SL, SN



Popis

Těleso svítidla je vyrobeno z hlubokotaženého lakovaného (**SL**) nebo nerezové (**SN**) oceli. Difuzor je vyroben z tvrzeného skla, přichyceného k tělesu nerezovými sponami. Elektrické komponenty jsou osazeny na bíle lakovaném reflektoru.

Provedení:

Typ SL - ocelový lakovaný plech (standardní provedení)

Typ SN - nerezový plech

Svítilno obsahuje závěsná oka a průchodku.

Na objednávku lze dodat svítidlo s **Al hlubokozářičem**.

Description

Body made of deep drawn epoxy powdered (**SL**) or stainless steel (**SN**). Diffuser made of impact resistant hardened glass. Electrical components are assembled on gear tray made of steel plate treated with Epoxy-polyester powder RAL 9003.

Specification:

Type SL - epoxy powdered deep drawn steel sheet - standard version



Type SN - stainless steel sheet

Packing contains suspension eyelets and grommet.

On request of customer is possible to assemble with narrow beam **Al reflector**.

Typ Type	Provedení Wattage	Svět. zdroj Light source	Rozměry Dimensions	[A/B/C] [A/B/C]	Kg
VM 118 SL, SN	1×18 W	T8	695	195 90	4,9
VM 136 SL, SN	2×36 W	T8	1305	195 90	5,9
VM 158 SL, SN	1×58 W	T8	1605	195 90	7,8
VM 218 SL, SN	2×18 W	T8	695	195 90	5,9
VM 236 SL, SN	2×36 W	T8	1305	195 90	7,7
VM 258 SL, SN	2×58 W	T8	1605	195 90	10,5
VM 114, 124 SL, SN	1×14/24 W	T5	669	460 90	
VM 128, 154 SL, SN	1×28/54 W	T5	1305	800 90	
VM 135, 149, 180 SL, SN	1×35/49/80 W	T5	1605	1100 90	
VM 214, 224 SL, SN	2×14/24 W	T5	695	460 90	
VM 228, 254 SL, SN	2×28/54 W	T5	1305	800 90	
VM 235, 249, 280 SL, SN	2×35/49/80 W	T5	1605	1100 90	

→ Připojovací otvory




Závěsné oko

Suspension eyelet



Kovová spona

Stainless steel clip

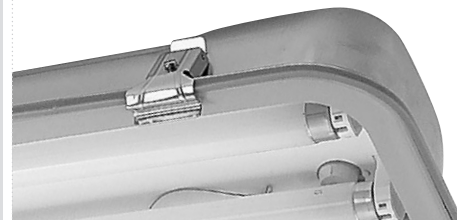

Svítilno s Al hlubokozářičem

Luminaire with narrow beam Al reflector

